265XP PRECISION SERIES
SELF-CONTAINED COMPACTOR

WASTEQUIP®

Introducing the first ever Precision Series self-contained compactor designed and engineered for performance.

c UL us

GUARDIAN CONTROL SYSTEM

» Automatic maintenance tracking

» Superior 24 volt controls and NEMA 4 rated enclosure

LARGEST ACCESS OPENING FOR MAINTENANCE / SERVICE

» Easy to inspect and access cylinders and hoses

PRECISION-GUIDED RAM

» Glides smoothly above floor on UHMW guides

» Ram penetrates 7″ into container to minimize spring-back

LONGEST STANDARD WARRANTY

» 5-year structural warranty

Patent Pending

IDEAL FOR:

Supermarkets

Malls

Hospitals

Restaurants

Office Buildings

Retail Establishments

BEST-IN-CLASS BENCHMARK TESTING

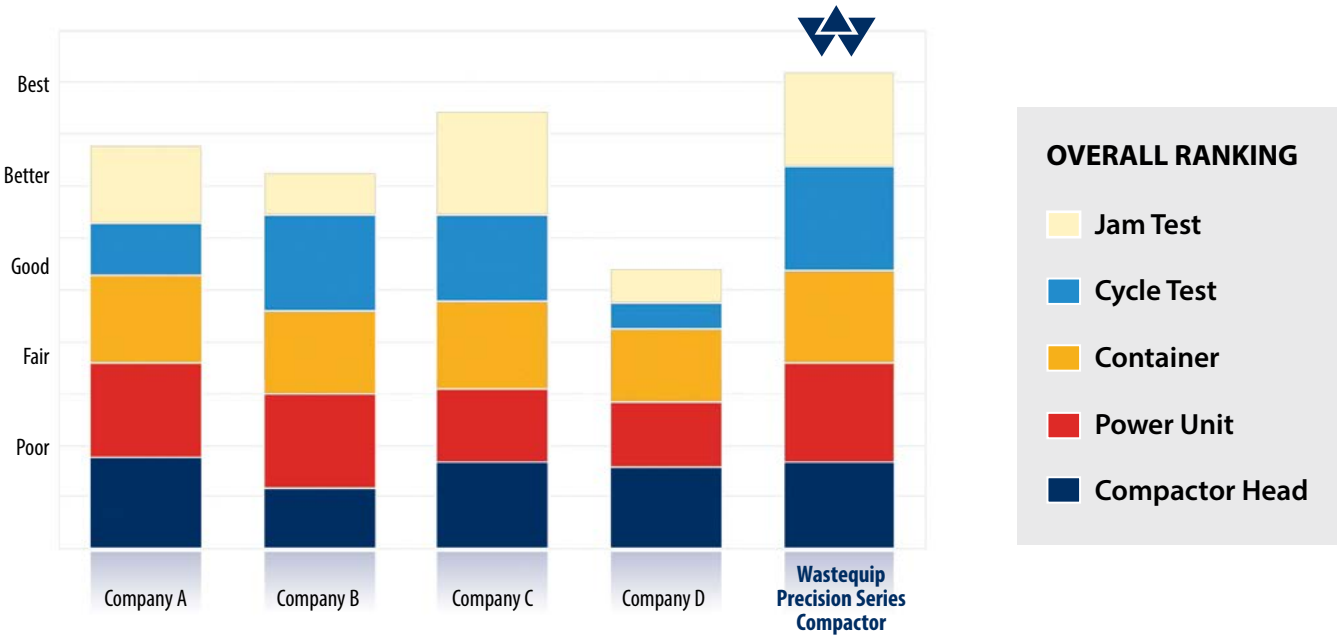

TESTING CRITERIA

COMPACTOR HEAD
Ram base, face, floor plate, ram travel, and sidewall

POWER UNIT
Oil reservoir, pressure switch or transducer, directional valve, pump size and PLC

CONTAINER
Capacity, door sheet, side wall, door seal, hinge system and shipping height

JAM TEST
Flex/twist, ram rack and damage

CYCLE TEST
Operation, wear and reliability

FEATURING OUR GUARDIAN CONTROL SYSTEM

Value-Added Standard Features	Wastequip Guardian Control	Competitor A	Competitor B
Power unit runs any brand compactor	✓		
Automatic maintenance alerts	✓		
NEMA 4 rated control panel	✓		
Push button start	✓		
Low temperature oil	✓		✓
Pack-out override	✓		
Watch dog timer	✓	✓	
24 volt controls	✓		✓
Programmable logic controller	✓	✓	✓
Multi-cycle timer	✓	✓	✓
Full light	✓	✓	

PRECISION-GUIDED RAM

5 YEAR Structural Warranty

Breaker bar is engineered for increased strength and is designed for additional structural support.



Ram is suspended above chamber floor and glides on near frictionless UHMW guides.



Large 40" X 60" clear top opening is WASTEC rated at 1.48 cubic yards

7" penetration into the container reduces spring-back of material into charge chamber

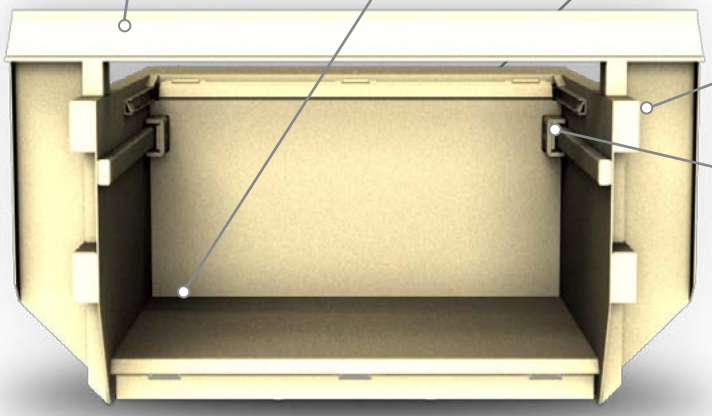

UHMW guides are long lasting and can be easily replaced

LARGEST MAINTENANCE ACCESS IN THE INDUSTRY

- Large 49" X 18" access opening
- Hydraulic hoses are easy to inspect /replace
- Clean out area designed to drain excessive liquid
- Up to 33% less time to change cylinders

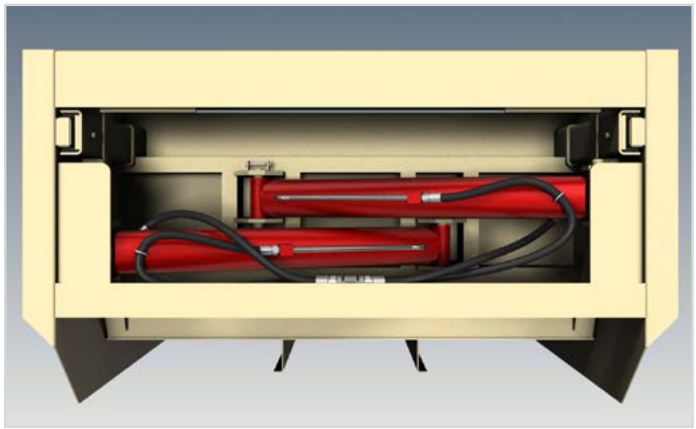

ADJUSTABLE SLIDING HINGE

- Adjustable sliding hinge draws door in evenly
- Heavy-duty design and full door seal

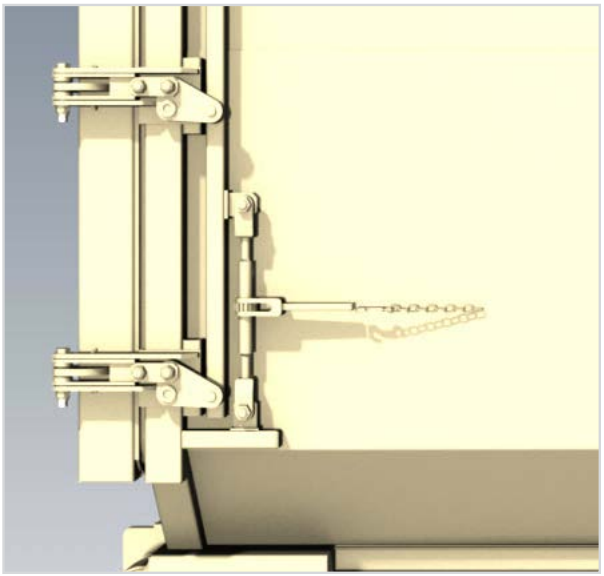

265XP PRECISION SERIES COMPACTOR

FEATURES

STANDARD

- Precision-guided ram system
- Guardian Control System
- Automatic Maintenance Scheduler (AMS)
- NEMA 4 enclosure
- Controls in panel face
- 5-year structural warranty
- 33-second cycle time
- Full container light
- Low temperature oil
- Multi-cycle timer
- Operational and service manual
- Primed and painted in several colors

OPTIONS

- Advance warning light
- Pressure gauge - color coded
- Controls on remote pendant in lieu of mounting in panel face
- Guide rails with stops
- Oil heater
- Photo electric eye
- Odor control system
- Container lifter
- HT (Hinged Tailgate) models

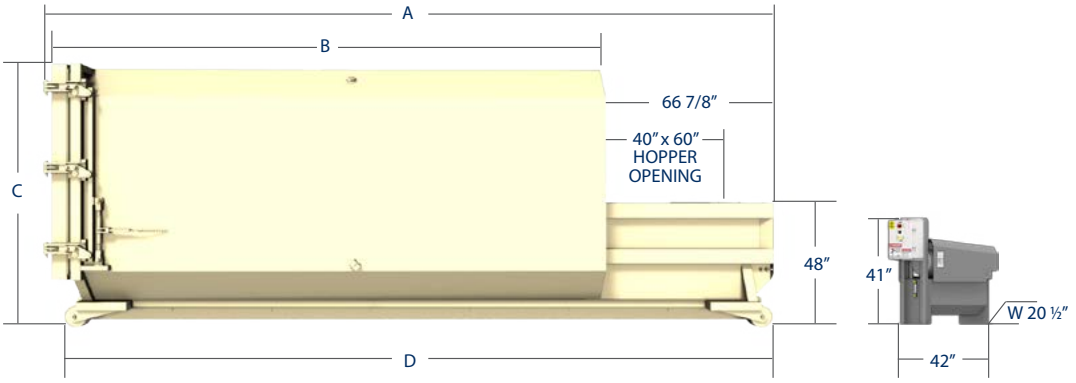

Compactor Models	265XP model (cu. yds.)	Overall length (A) (in.)	Container length (B) (in.)	Overall height (C) (in.)	Floor length (D) (in.)*	Width (in.)	Weight (lbs.)
	20	188	121-1/8	100	187	102	8,500
	25	218	148-1/8		217		8,850
	30	248	178-1/8		246		9,450
	35	278	208-1/8		277		10,000
	38	299	229-1/8		298		10,500

* Bullnose to bullnose

WASTEC MEMBER

GO TO PARTS™ Replacement parts available online at www.gotoparts.com

SPECIFICATIONS

Charge Box
- Wastequip rating - 2.00 cubic yards
- Wastec rating - 1.48 cubic yards
- Clear top opening - 40″ Length x 60″ Width

Ram
- 1/4″ steel construction with engineered structural reinforcements and precision guided ram system

Compactor Head
- Floor - 3/8″ with two 5″ channel supports
- Sides - 3/16″ side plates with 6″ x 3″ formed steel stiffener
- Top rail - 6″ x 3″ formed steel stiffener
- Breaker bar - 6″ x 6″ x 1/2″ angle steel
- Sump - 12″ height

Electrical
- Electric motor - 10 hp TEFC (Totally Enclosed Fan Cooled)
- Voltage - 208/230/460, 3 phase, 60 HZ (optional 575V)
- Power box - NEMA 4 rated, UL listed
- Automated cycle operation - turn key switch-ram extends, retracts and stops automatically

Hydraulic Specifications
- Pump - 11.7 gpm
- Ram penetration - 7″
- Cycle time - 33 seconds
- Hydraulic cylinder - (2), cylinder bore - 4″
- Cylinder rod - 2.5″
- Hydraulic oil tank - 20 gallon reservoir
- Power unit location - remote

Hydraulic Performance

Ram face pressure
- Normal - 39,800 lbs
- Maximum - 49,500 lbs

Ram psi
- Normal - 25.00 psi
- Maximum - 31.73 psi

Operating pressure
- Normal - 1,850 psi
- Maximum - 2,300 psi

Container
- 7 gauge floor with 3″ channel crossmember
- 6″ x 2″ x 1/4″ tube rails, 36-1/2″ I.D. between rails
- Solid steel bullnose and hook at both ends
- 4″ diameter rollers, 4-1/2″ long
- Length, Width and Height - see chart above

Standard Color Choices*

White, Gray, Black, Teal, Med. Blue, Dark Blue, Med. Green, Dark Green, Cream, Yellow, Orange, Red, Burgundy, Brown

Colors shown are as accurate as printing allows. The actual color is subject to variation from the printed color sample. Color choices vary by plant location. Please contact your local sales representative for available colors. Custom colors are available upon request and are subject to an additional charge.

WASTEQUIP®

877.468.9278 · sales@wastequip.com · www.wastequip.com

Wastequip is the leading North American manufacturer of waste and recycling equipment for collecting, processing and transporting recyclables and solid or liquid waste. © Wastequip, August 2015. All rights reserved. Specifications subject to improvement without notice. Equipment displayed should be operated by properly trained personnel. Operators should become familiar with OSHA, ANSI and any other applicable standards or laws for using this equipment. Improper use, misuse, or lack of maintenance could cause injury to people and/or property. Photos used in the literature are illustrative only. We assume no liability or responsibility for proper training/operation of equipment not manufactured by Wastequip. We reserve the right to make changes at any time without notice. Information contained within this literature is intended to be the most accurate available at time of printing.

WQP081-082015